

# Technical Data Sheet

**Product Name:** PLCC 3020 High Bright Yellow LED

**Part Number:** GTG3020UYC

**Customer:** \_\_\_\_\_

**Customer PN:** \_\_\_\_\_

**Version:** A.2

**Date:** 2013.01.01





|                          |  |  |
|--------------------------|--|--|
| <b>Customer Approval</b> |  |  |
|                          |  |  |

**Instituted By:** \_\_\_\_\_ **Checked By:** \_\_\_\_\_ **Approved By:** \_\_\_\_\_



## 1. Features

- Package ( L/W/H ) :  $3.0 \times 2.0 \times 1.3$  mm
- Color : Ultra Bright Yellow
- Lens: Water Clear Flat Mold
- EIA STD Package
- Meet ROHS, Green Product
- Compatible With SMT Automatic Equipment
- Compatible With Infrared Reflow Solder And Wave Solder Process

## 2. Package Profile & Soldering PAD Suggested

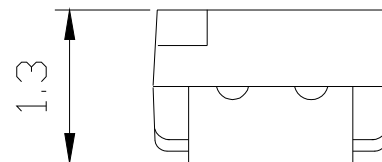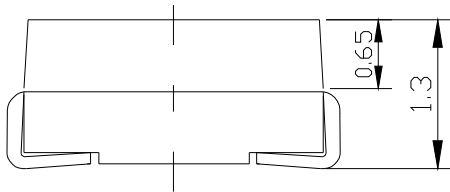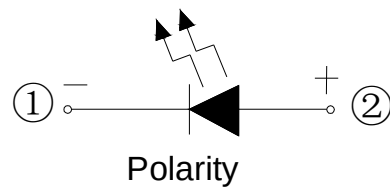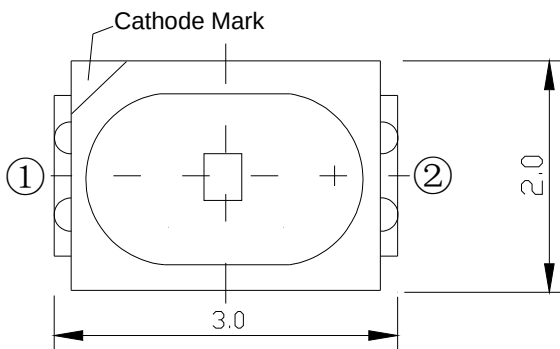


### Soldering PAD Suggested:

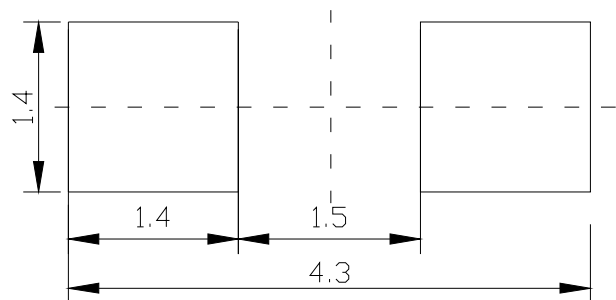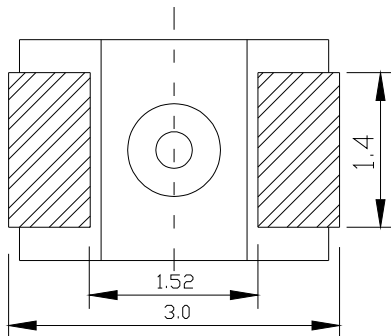


- Notes:
1. All dimensions are in millimeters ;
  2. Tolerance is  $\pm 0.10$  mm unless otherwise noted.

### 3. Soldering Profile Suggested

#### 3.1、 For Lead Solder

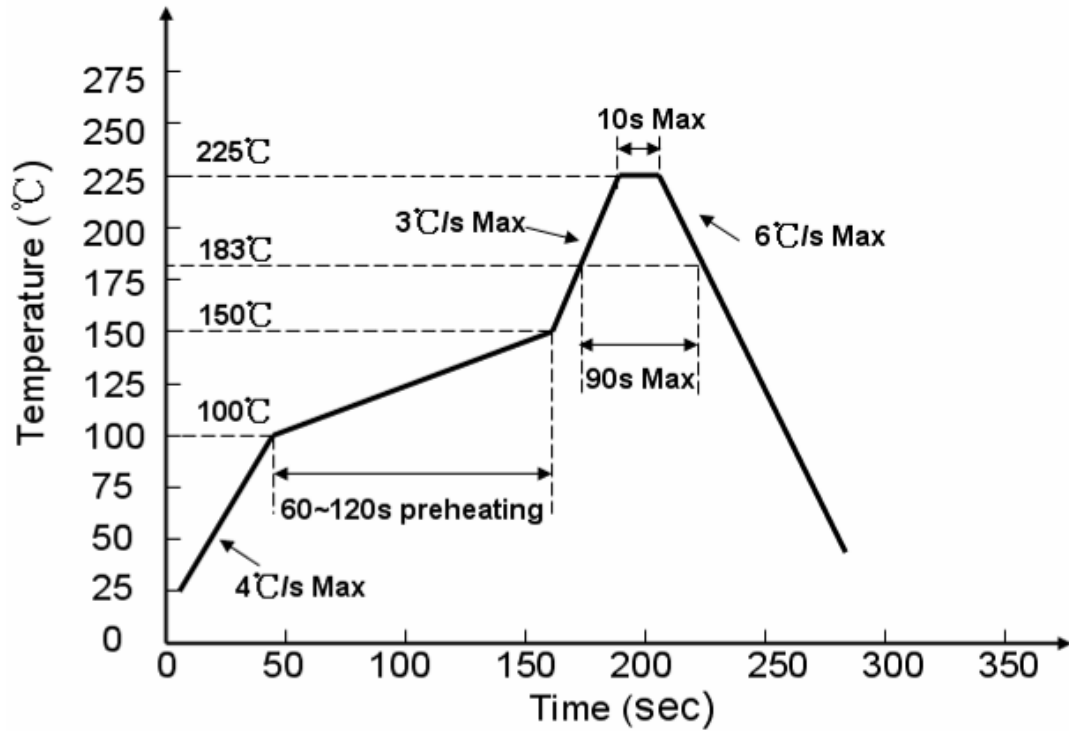

#### 3.2、 For Lead Free Solder

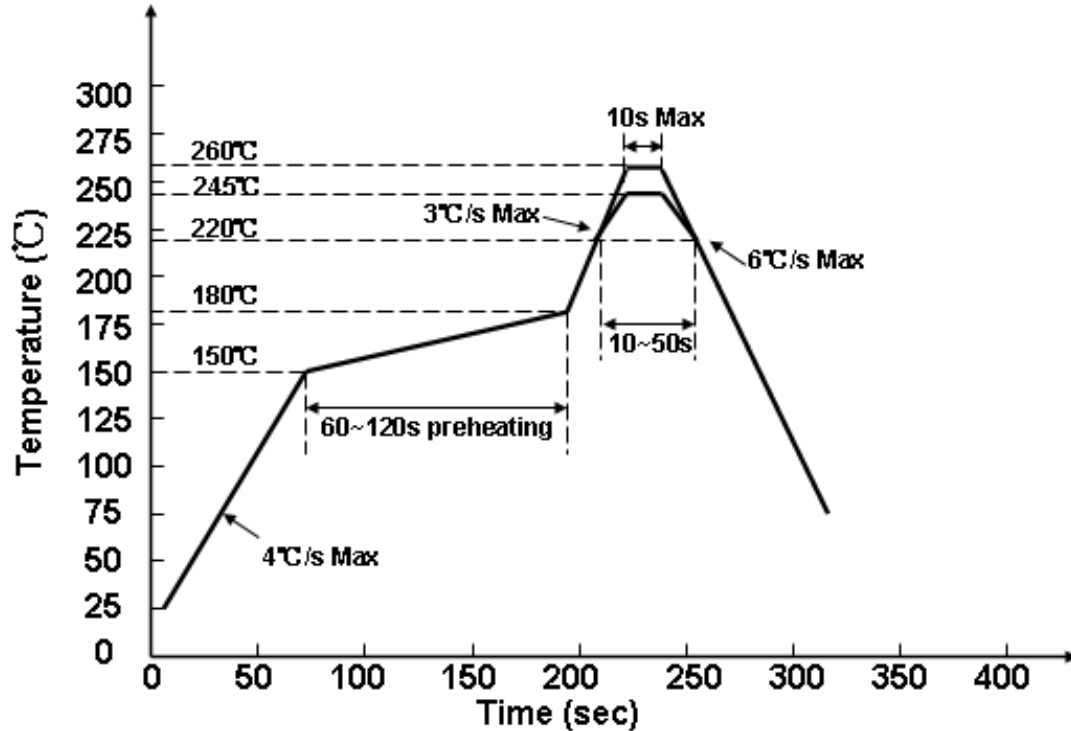

Notes:

We recommend the soldering temperature  $245 \pm 5^{\circ}\text{C}$  ;

The maximum temperature should be limited to  $260^{\circ}\text{C}$ .

4. Absolute Maximum Ratings At Ta=25°C

| Parameter                                                    | Symbol | Rating                                                                        | Unit |
|--------------------------------------------------------------|--------|-------------------------------------------------------------------------------|------|
| Power Dissipation                                            | Pd     | 70                                                                            | mW   |
| Peak Forward Current<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | IFP    | 70                                                                            | mA   |
| DC Forward Current                                           | IF     | 30                                                                            | mA   |
| Reverse Voltage                                              | VR     | 5                                                                             | V    |
| Operating Temperature Range                                  | Topr   | -30°C ~ + 85°C                                                                |      |
| Storage Temperature Range                                    | Tstg   | -40°C ~ + 90°C                                                                |      |
| Soldering Condition                                          | Tsol   | Reflow soldering : 260°C For 5 Seconds<br>Hand soldering: 300°C For 3 Seconds |      |

## 5. Electrical Optical Characteristics At Ta=25°C

| Parameter                | Symbol          | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|------|------|------|------|----------------|
| Luminous Intensity       | IV              | ---  | 200  | ---  | mcd  | IF = 20mA      |
| Viewing Angle            | 2 $\theta$ 1/2  | ---  | 120  | ---  | deg  | IF = 20mA      |
| Dominant Wavelength      | $\lambda_d$     | ---  | 587  | ---  | nm   | IF=20mA        |
| Peak Wavelength          | $\lambda_p$     | ---  | 589  | ---  | nm   | IF=20mA        |
| Spectral Line Half-Width | $\Delta\lambda$ | ---  | 15   | ---  | nm   | IF=20mA        |
| Forward Voltage          | VF              | 1.8  | ---  | 2.6  | V    | IF=20mA        |
| Reverse Current          | IR              | ---  | ---  | 10   | uA   | VR=5V          |

- Notes: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2.  $\theta$ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength,  $\lambda_d$  is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.

6. Typical Electrical-Optical Characteristics Curves

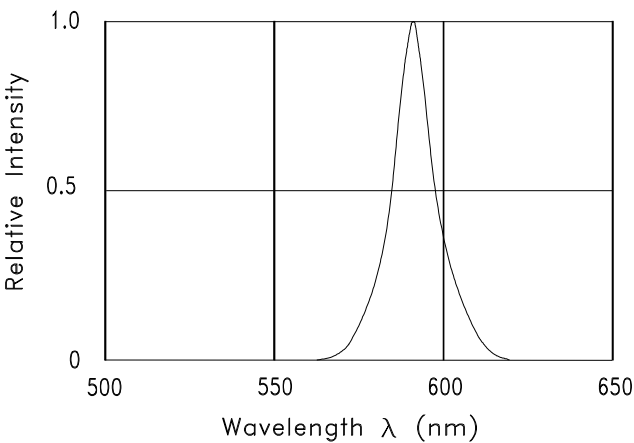


Fig.1 RELATIVE INTENSITY VS. WAVELENGTH

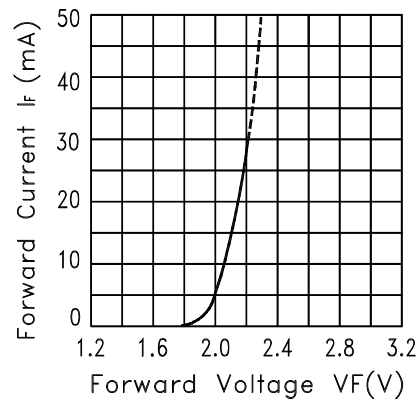


Fig.2 FORWARD CURRENT VS. FORWARD VOLTAGE

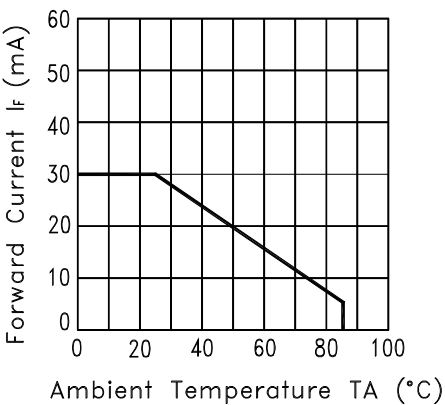


Fig.3 FORWARD CURRENT DERATING CURVE

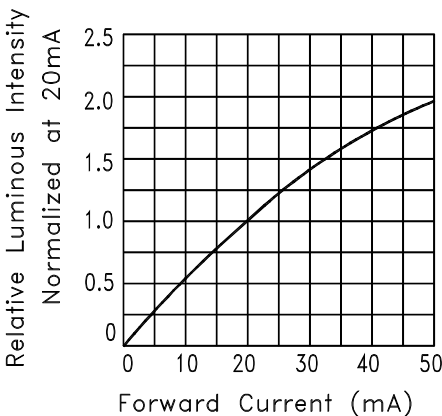


Fig.4 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

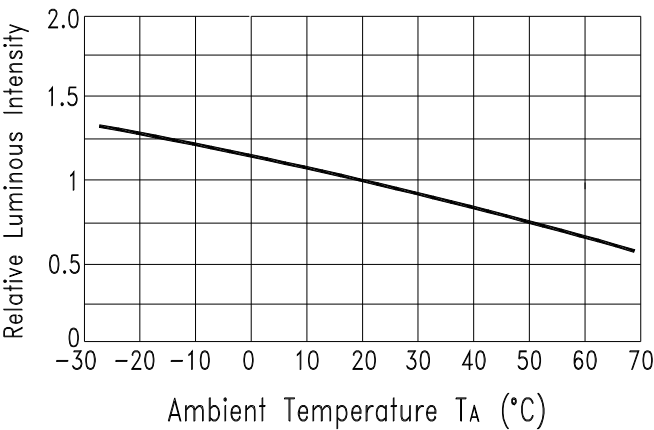


Fig.5 Luminous Intensity vs.Ambient Temperature


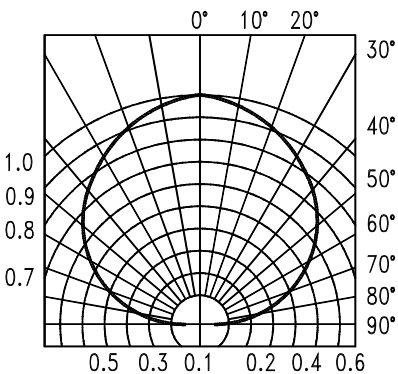


Fig.6 SPATIAL DISTRIBUTION


## 7. Label Explanation

CAT: Luminous Intensity Rank (unit : mcd)  
HUE: Dominant Wavelength Rank (unit : nm)  
REF: Forward Voltage Rank (unit : V)

Rank Tolerance:  
a. Luminous Intensity:  $\pm 15\%$   
b. HUE:  $\pm 1\text{nm}$   
c. Forward Voltage:  $\pm 0.1\text{V}$

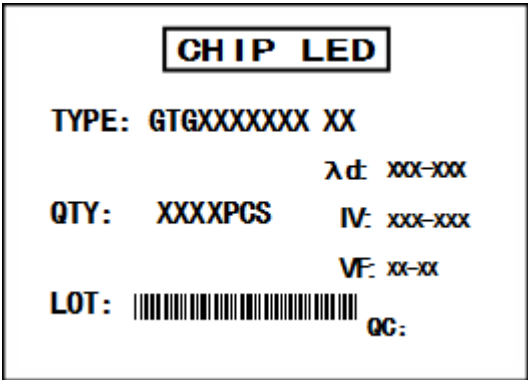


## 8.Reel And Tape Dimensions:

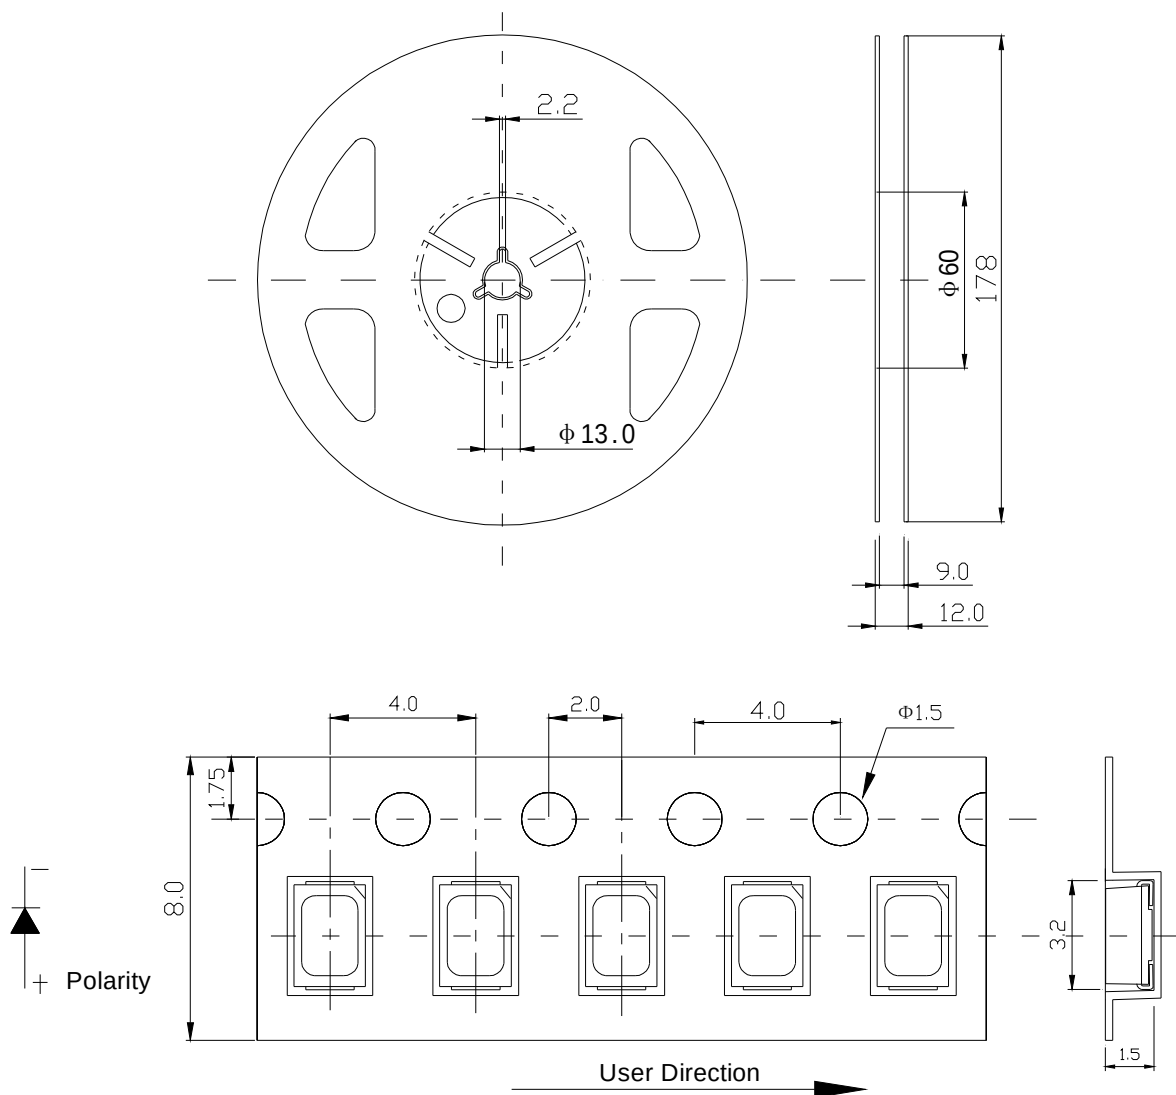


Notes: 1. All dimensions are in millimeters ;  
2. Tolerance is  $\pm 0.1\text{ mm}$  unless otherwise noted.

9. Tape Leader & Trailer Dimensions And Reel

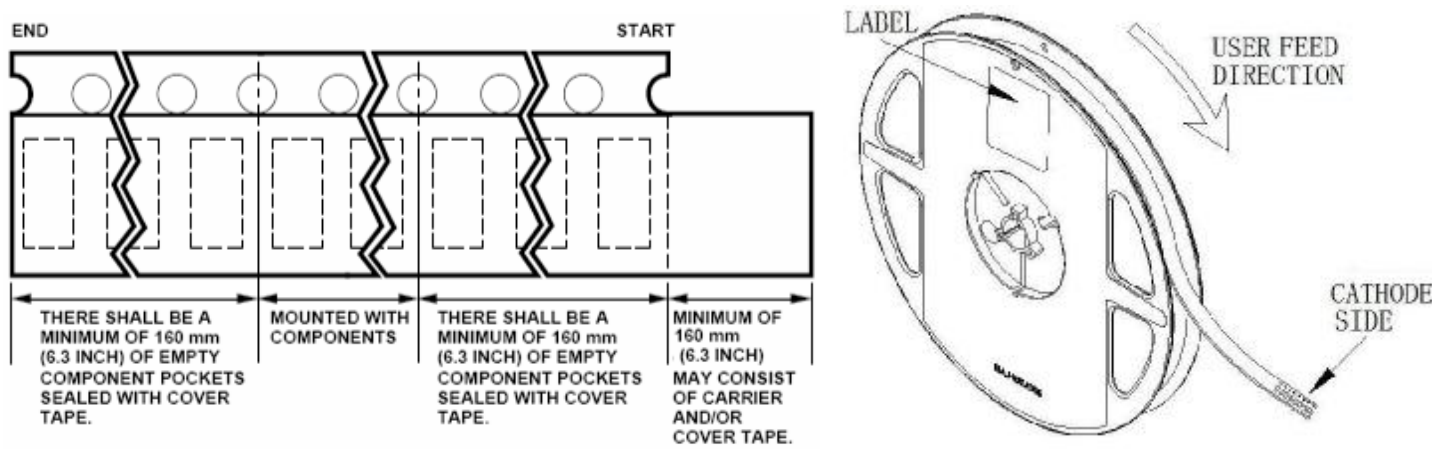

10. Packaging:

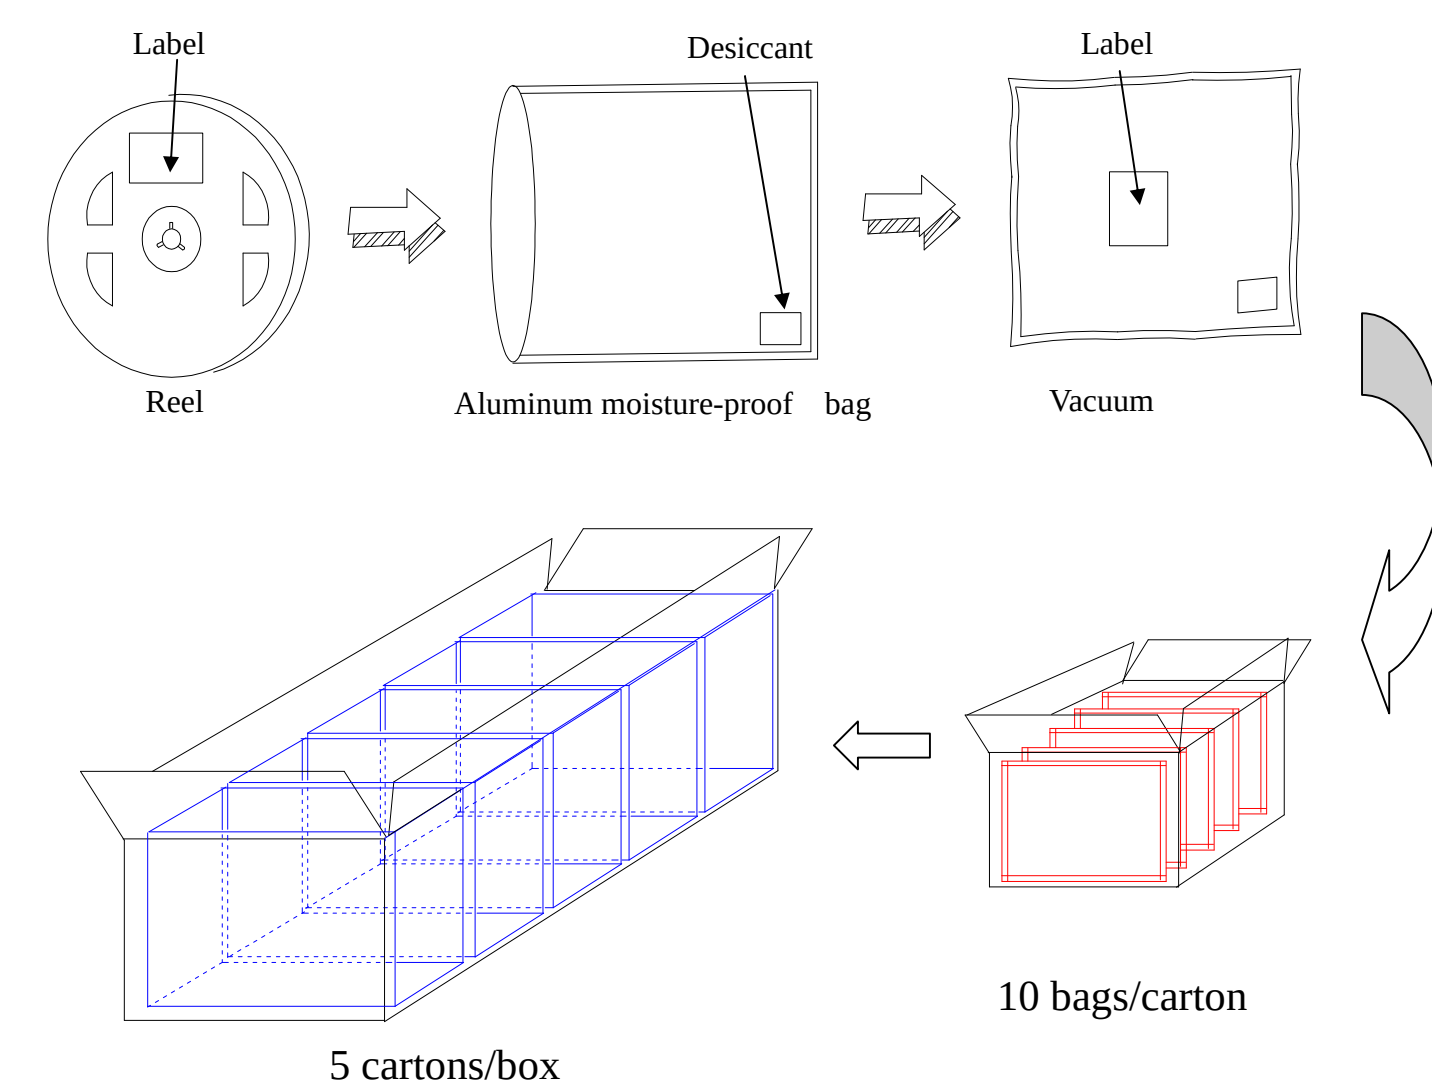




## 11. Reliability Test

| Classification     | Test Item                               | Test Condition                                                                                                                                                                                                                                                                  | Reference Standard               | Reference Standard                                                                                |
|--------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| Endurance Test     | Operation Life                          | Ta= Under Room Temperature As Per Data Sheet Maximum Rating                                                                                                                                                                                                                     | 1000HRS<br>(-24HRS,+72HRS)*@20mA | MIL-STD-750D:1026<br>MIL-STD-883D:1005<br>JIS C 7021:B-1                                          |
|                    | High Temperature, High Humidity Storage | IR-Reflow In-Board, 2 Times<br>Ta= 65±5℃,RH= 90~95%                                                                                                                                                                                                                             | 240HRS±2HRS                      | MIL-STD-202F:103B<br>JIS C 7021:B-11                                                              |
|                    | High Temperature Storage                | Ta= 105±5℃                                                                                                                                                                                                                                                                      | 1000HRS<br>(-24HRS,+72HRS)       | MIL-STD-883D:1008<br>JIS C 7021:B-10                                                              |
|                    | Low Temperature Storage                 | Ta= -55±5℃                                                                                                                                                                                                                                                                      | 1000HRS<br>(-24HRS,+72HRS)       | JIS C 7021:B-12                                                                                   |
| Environmental Test | Temperature Cycling                     | 105℃ ~ 25℃ ~ -55℃ ~ 25℃<br>30mins 5mins 30mins 5mins                                                                                                                                                                                                                            | 10 Cycles                        | MIL-STD-202F:107D<br>MIL-STD-750D:1051<br>MIL-STD-883D:1010<br>JIS C 7021:A-4                     |
|                    | Thermal Shock                           | IR-Reflow In-Board, 2 Times<br>85 ± 5℃ ~ -40℃ ± 5℃<br>10mins 10mins                                                                                                                                                                                                             | 10 Cycles                        | MIL-STD-202F:107D<br>MIL-STD-750D:1051<br>MIL-STD-883D:1011                                       |
|                    | Solder Resistance                       | T.sol= 260 ± 5℃                                                                                                                                                                                                                                                                 | 10 ± 1secs                       | MIL-STD-202F:210A<br>MIL-STD-750D:2031<br>JIS C 7021:A-1                                          |
|                    | IR-Reflow Normal Process                | Ramp-up rate(183℃ to Peak) +3℃/ second max<br>Temp. maintain at 125(±25)℃ 120 seconds max<br>Temp. maintain above 183℃ 60-150 seconds<br>Peak temperature range 235℃ +5/-0℃<br>Time within 5℃ of actual Peak Temperature (tp)<br>10-30 seconds<br>Ramp-down rate +6℃/second max | -----                            | MIL-STD-750D:2031.2<br>J-STD-020C                                                                 |
|                    | IR-Reflow Pb Free Process               | Ramp-up rate(217℃ to Peak) +3℃/ second max<br>Temp. maintain at 175(±25)℃ 180 seconds max<br>Temp. maintain above 217℃ 60-150 seconds<br>Peak temperature range 260℃ +0/-5℃<br>Time within 5℃ of actual Peak Temperature (tp)<br>20-40 seconds<br>Ramp-down rate +6℃/second max | -----                            | MIL-STD-750D:2031.2<br>J-STD-020C                                                                 |
|                    | Solderability                           | T.sol= 235 ± 5℃<br>Immersion rate 25±2.5 mm/sec<br>Coverage ≧ 95% of the dipped surface                                                                                                                                                                                         | Immersion time 2±0.5 sec         | MIL-STD-202F:208D<br>MIL-STD-750D:2026<br>MIL-STD-883D:2003<br>IEC 68 Part 2-20<br>JIS C 7021:A-2 |


## 12. Cautions

### Application

1. A LED is a current-operated device. The slight shift of voltage will cause big change of current, which will damage LEDs. Customer should use resistors in series for the Over-Current-Proof.
2. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended to use individual resistor separately, as shown in Circuit A below. The brightness of each LED shown in Circuit B might appear difference due to the differences in the I-V characteristics of those LEDs.

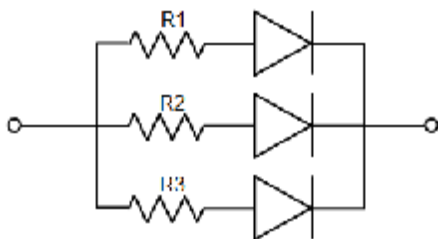

**Circuit model A**

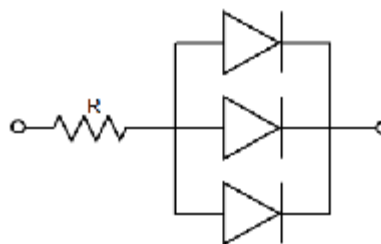

**Circuit model B**

3. High temperature may reduce LEDs' intensity and other performances, so keeping it away from heat source to get good performance is necessary.

### Storage

1. Before opening original package, it is recommended to store them in the following environment:  
Temperature: 5°C~30°C                      Humidity: 85%RH max.
2. After opening original package, the storage ambient for the LEDs should be in 5~30°C temperature and 60% or less relative humidity.
3. In order to avoid moisture absorption, it is recommended that the LEDs that out of the original package should be stored in a sealed container with appropriate desiccant, or in desiccators with nitrogen ambient.
4. The LEDs should be used within 168hrs (7 days) after opening the package. Once been mounted, soldering should be quick.
5. If the moisture absorbent material (silica gel) has faded away or the LEDs stored out of original package for more than 168hrs (7 days), baking treatment should be performed using the conditions: 60°C at least 24 hours.

### ESD (Electrostatic Discharge )-Protection

A LED (especially the Blue、 White and Green product) is an ESD sensitive component, and static electricity or power surge will damage the LED. ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or “no light-up” at low currents, etc.

Some advice as below should be noticed:

1. A conductive wrist strap or anti-electrostatic glove should be worn when handling these LEDs.
2. All devices, equipment, machinery, work tables and storage racks, etc. must be properly grounded.

3. Use anti-static package or boxes to carry and storage LEDs. And ordinary plastic package or boxes is forbidden to use.
4. Use ionizer to neutralize the static charge during handling or operating.
5. All surfaces and objects within 1 ft close to LEDs measure less than 100V.

### **Cleaning**

Use alcohol-based cleaning solvents such as IPA (isopropyl alcohol) to clean LEDs if necessary.

### **Soldering**

1. Soldering condition refer to the draft “Soldering Profile Suggested” on page 1.
2. Reflow soldering should not be done more than 2 times.
3. Manual soldering is only suggested on repair and rework. The maximum soldering temperature should not exceed 300°C within 3 sec. And the maximum capacity of soldering iron is 30W in power.
4. During the soldering process, do not touch the lens at high temperature.
5. After soldering, any mechanical force on the lens or any excessive vibration shall not be accepted to apply, also the circuit board shall not be bent as well.

### **Others**

1. The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications).Consult Gtlight’s Sales in advance for the applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health. (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).
2. The light output from the high luminous intensity LEDs may cause injury to human eyes when viewed directly.
3. The appearance and specifications of the product may be modified for improvement without prior notice.